


## Brass manifold for radiator heating CM-N

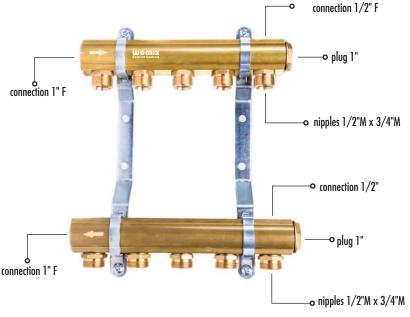

Brass manifold **CM-N** is responsible for distribution and regulation of the heating medium. The manifold allows connecting different circuits and installation zones, increasing the efficiency of the heating system. It contains two C-profile beams connected with two steel holders, connections for air vents, connections for supply and return of the system and nipples with an o-ring.


## Technical data:

Destination: radiator heating

Material: brass Section number: 2 - 12

Construction: C-profile brass beams

Permissible operating temperature: 95°C
Permissible operating pressure: 6 bar
Manifold beam spacing: 220 mm

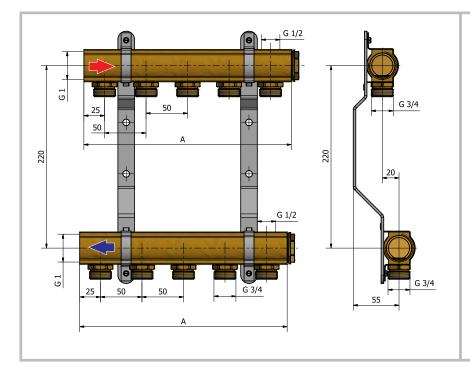

Name	Nr of sections	A (mm)	Catalog number
CM-N 2F	2	100	200202
CM-N 3F	3	150	200203
CM-N 4F	4	200	200204
CM-N 5F	5	250	200205
CM-N 6F	6	300	200206
CM-N 7F	7	350	200207
CM-N 8F	8	400	200208
CM-N 9F	9	450	200209
CM-N 10F	10	500	200210
CM-N 11F	11	550	200211
CM-N 12F	12	600	200212