

Pump group SA 125 - DN 32 (1 1/4") - without mixing valve



Compact pump group **SA 125 - DN 32** is equipped with three brass ball valves including two with thermometers supply and return (with built-in check valve) steel connector and insulation. On request, the group can be equipped with a pump **Grundfos** or **Wilo**.

WARNING! Group comes from the supply side to the right. Sides can be switched.

Technical data:

Max pressure:	8 bar
Max temperature:	110 °C
Insulation material:	EPP black 60g/l
Axle spacing:	125 mm
Gaskets material:	VITON/EPDM
Connections:	Installation side: 1" 1/4 F
	Boiler side: 2" M
Installation length of pump:	180 mm
Connection of the pump:	2"M

Type	Catalog number
Pump group SA 125 - DN 32 (1 1/4") with insulation, without pump	607051
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Wilo Yonos Para 30/6	607158
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Wilo Yonos Para 30/8	607159
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Wilo Yonos Pico 30/1-6	607056
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Wilo Yonos Pico 30/1-8	607057
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Grundfos Alpha 2 32 - 60	607054
Pump group SA 125 - DN 32 (1 1/4") with insulation, with pump Grundfos Alpha 1 L 32-60	607055

Pump group with pumps:




Wilo Yonos Para

Wilo Yonos Pico

Grundfos Alpha 2

Grundfos Alpha 1L

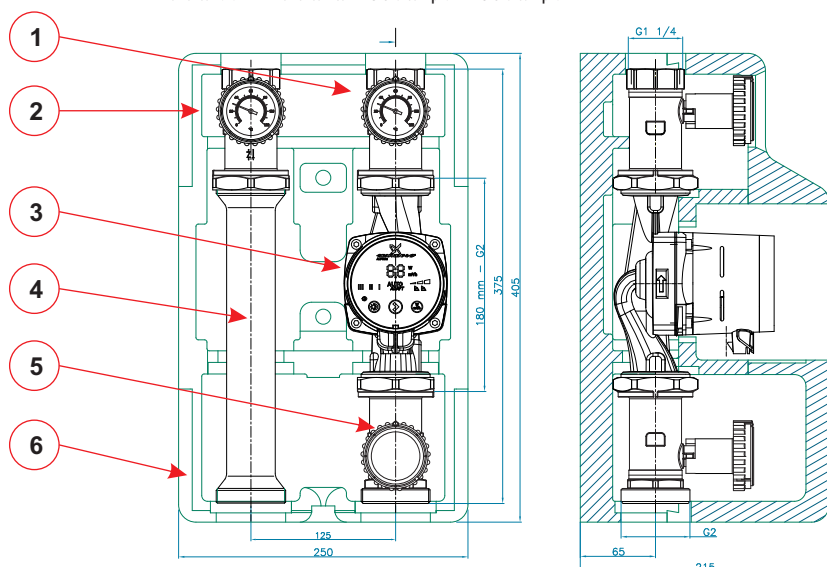

1. Supply ball valve with a thermometer 0-120 °C with a red handle.
2. Return ball valve with a thermometer 0-120 °C with a non-return valve, with a blue handle.
3. Circulation pump (option) from Grundfos or WILO.
4. 280mm steel spacer.
5. Ball valve with steel handle.
6. EPP insulation.

