

Thermostatic mixing valve TMT




Thermostatic mixing valves TMT series are designed to regulate domestic hot water. Protect the system against too high temperature hot water which in turn protects the user from burns. Do not install these valves in solar installations.

Technical data:

Max. temp. of hot water:	+85°C
Adjustable temperature range:	30 °C - 65 °C (+/- 2K)
Max operating pressure:	10 bar
Recommended pressure:	1 - 5 bar

Type	Kvs	Connection	Catalog number
Thermostatic mixing valve TMT 12 F - 1/2"F	1,6	1/2" F	601101
Thermostatic mixing valve TMT 34 F - 3/4"F	1,8	3/4" F	601102
Thermostatic mixing valve TMT 34 M - 3/4"M	1,8	3/4" M	601103
Thermostatic mixing valve TMT 100 F - 1"F	3,2	1" F	601104
Thermostatic mixing valve TMT 100 M - 1"M	3,2	1" M	601105
Thermostatic mixing valve TMT 114 M - 1 1/4"M	7,4	1 1/4" M	601106
Thermostatic mixing valve TMT 112 M - 1 1/2"M	7,6	1 1/2" M	601107

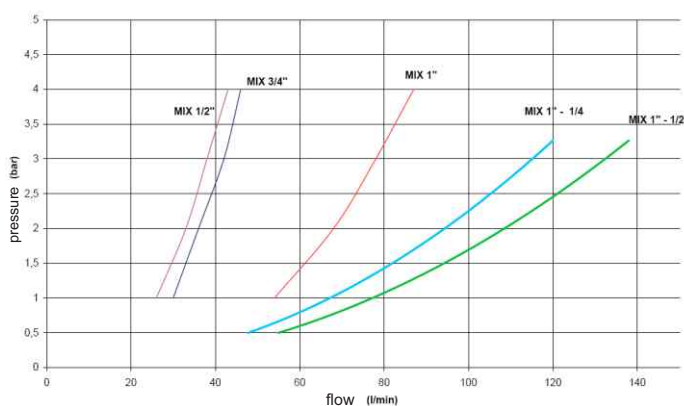

MIX 1/2"	- kv = 1,6
MIX 3/4"	- kv = 1,8
MIX 1"	- kv = 3,2
MIX 1 1/4"	- kv = 4,0
MIX 1 1/2"	- kv = 4,1

Typ	Przyłącze
Thermostatic mixing valve TMT 12 F - 1/2"GW	1/2" GW
Thermostatic mixing valve TMT 34 F - 3/4"GW	3/4" GW
Thermostatic mixing valve TMT 34 M - 3/4"GZ	3/4" GZ
Thermostatic mixing valve TMT 100 F - 1"GW	1" GW
Thermostatic mixing valve TMT 100 M - 1"GZ	1" GZ
Thermostatic mixing valve TMT 114 M - 1 1/4"GZ	1 1/4" GZ
Thermostatic mixing valve TMT 112 M - 1 1/2"GZ	1 1/2" GZ

