

Central heating zone manifold C 100 - DN 25 (1")



(optional)

Wall bracket kit
Delta



Check valve




Two-chamber steel manifold **C 100 DN 25** - 2, 3, 4, 5 or 6 heating circuits was created to simplify installation of pump groups. The factory manifold is equipped with EPP insulation. In addition, the manifold has an output DN 20 on the return side for connecting pressure vessel and the output DN 25 on the power supply for connecting the safety group. On request, the manifold can be equipped with a set of mounting brackets on the wall **DELTA** (see bushings M8).

Warning! The exception is the manifold C 100 6F. The above-mentioned manifold can be equipped with a set of mounting brackets on the floor (see the socket G1 ").

Technical data:

Raw material:	steel ST 37.1
Max pressure:	8 bar
Max temp.:	110°C
Max. power:	110 kW (ΔT 20°C)
Axle spacing:	Installation side: 125 mm
	Boiler side: 125 mm
Connections:	Installation side: Nut 1 1/2 " F
	Boiler side: 1 1/4 " M
Insulation material:	EPP black 40 g/l

Type	Catalog number
Central heating zone manifold C 100 2F - DN 25 with insulation	626011
Central heating zone manifold C 100 3F - DN 25 with insulation	626012
Central heating zone manifold C 100 4F - DN 25 with insulation	626013
Central heating zone manifold C 100 5F - DN 25 with insulation	626014
Central heating zone manifold C 100 6F - DN 25 with insulation	626015
Brackets for mounting manifold on the floor (1 set = 2 pcs)	607040
Wall bracket kit DELTA for zone manifolds	606015
Check valve for pump group with mixing valve for manifolds C 60, C 70, CN 70, C 100, CN 100 - DN 25	606031

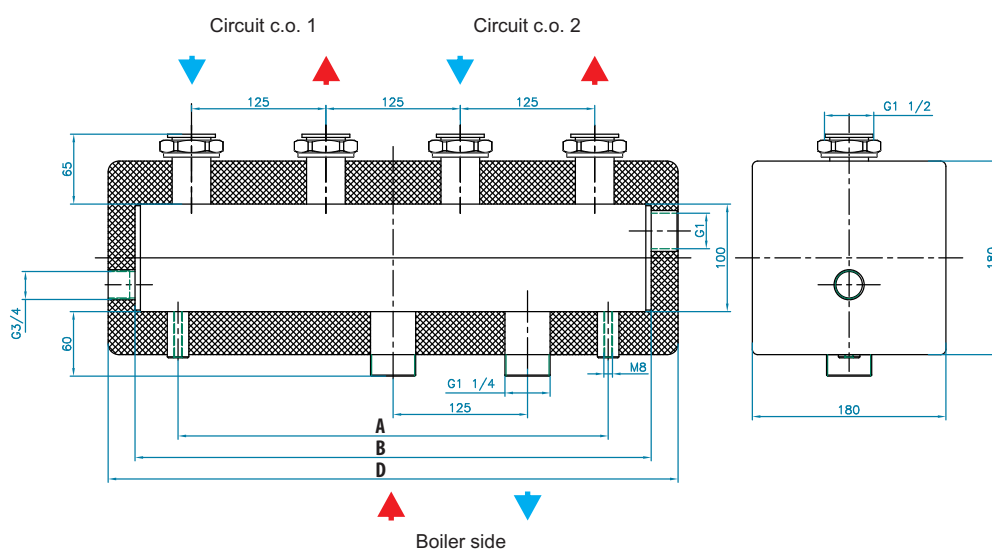

Number of heating circuits	A	B	C	D
2	400	480	X	530
3	665	745	X	795
4	930	1010	X	1060
5	1195	1275	X	1325
6	1100	1540	X	1590

