

## Central heating zone manifold CN 100 - DN 25



Two-chamber zone manifold **CN 100 - DN25** was created to facilitate the assembly of pump groups. The factory manifold is equipped with EPP insulation. In addition, the distributor has a DN 25 output on the supply side for connecting the safety group. On request, the manifold can be equipped with a set of mounting brackets on the **DELTA** wall.

### Technical data:

Material:	steel ST 37.1
Maks. pressure:	8 bar
Maks. temperature:	110°C
Max. power:	73 kW ( $\Delta T$ 20°C)
Axle spacing:	Installation side: 125 mm Boiler side: 125 mm
Connections:	Installation side: Nut 1 1/2" F Boiler side: Nut 1 1/2" F
Insulation material:	EPP black 40 g/l

(optional)


Wall bracket kit  
Delta



Check valve



Type	Catalog number
Hydraulic zone manifold <b>CN 100 2/3 F - DN 25</b> with insulation	626111
Hydraulic zone manifold <b>CN 100 3/5 F - DN 25</b> with insulation	626112
Hydraulic zone manifold <b>CN 100 4/7 F - DN 25</b> with insulation	626113
Wall bracket kit <b>DELTA</b> for zone manifolds	606015
Check valve for pump group with mixing valve for manifolds <b>C 60, C 70, CN 70, C 100, CN 100 - DN 25</b>	606031

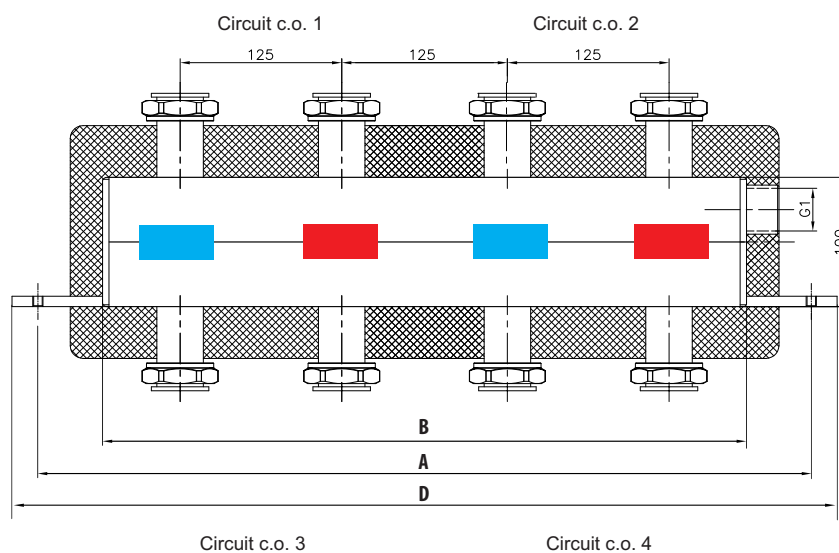

Number of heating circuits	A	B	C	D
2	580	480	X	620
3	845	745	X	885
4	1110	1010	X	1150

