


## Central heating zone manifold C2 100 - DN 50

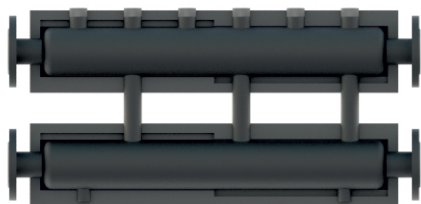


The C2 100 - DN 50 2 or 3-circuit steel zone manifold was created to facilitate the assembly of DN 25, 32 pump groups. It is factory-equipped with EPP insulation, 2 seals with a diameter adapted to the diameter of the manifold connection and a set of 8 assembly screws for connecting to another manifold or hydraulic separator.

The C2 100 - DN 50 manifold are adapted for the assembly of DN 25, DN 32 groups with a spacing of 125 mm.

Zone manifold can be combined with the C2 125 - DN 50 manifold, giving the possibility of using pump groups with spacing of 125 mm and 250 mm in one boiler room.

Type	Power at DT 20°C	Flow [m³/h]	Catalog number
Zone manifold C2 100 2 F - DN 50 with insulation,	120,00	6,00	609112
Zone manifold C2 100 3 F - DN 50 with insulation,	120,00	6,00	609113

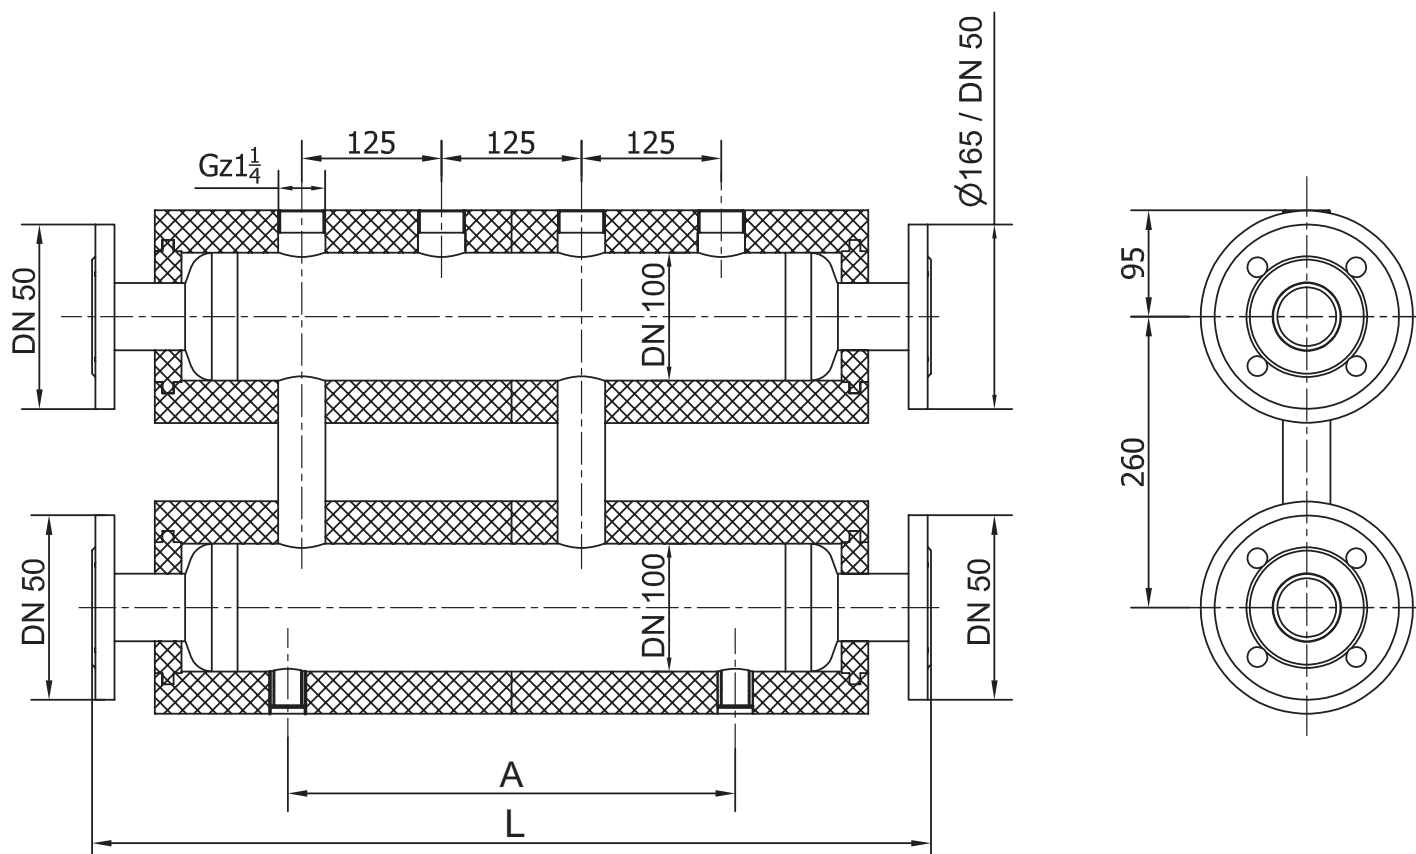

	L	A
C2 100 2F - DN 50	750 mm	400 mm
C2 100 3F - DN 50	1000 mm	500 mm

