



Central heating zone manifold C 60 - DN 20

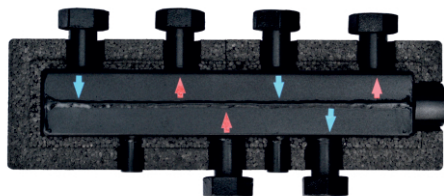

The two-chamber steel manifold C 60, 2, 3 or 4 circuit DN 20 was created to facilitate the assembly of mixing groups. The manifold is factory-equipped with EPP insulation. Additionally, it has a DN 25 outlet on the supply side for connecting the UNI X MINI safety group. On request, the device can be equipped with a set of DELTA wall mounting brackets.

Technical data:
 Material: steel
 Max. pressure: 8 bar
 Max. temperature: 110 °C
 Heating power: 35 kW at $\Delta T 20$ °C
 Axle spacing of the installation side: 90 mm
 Insulation: EPP black 40 g/l

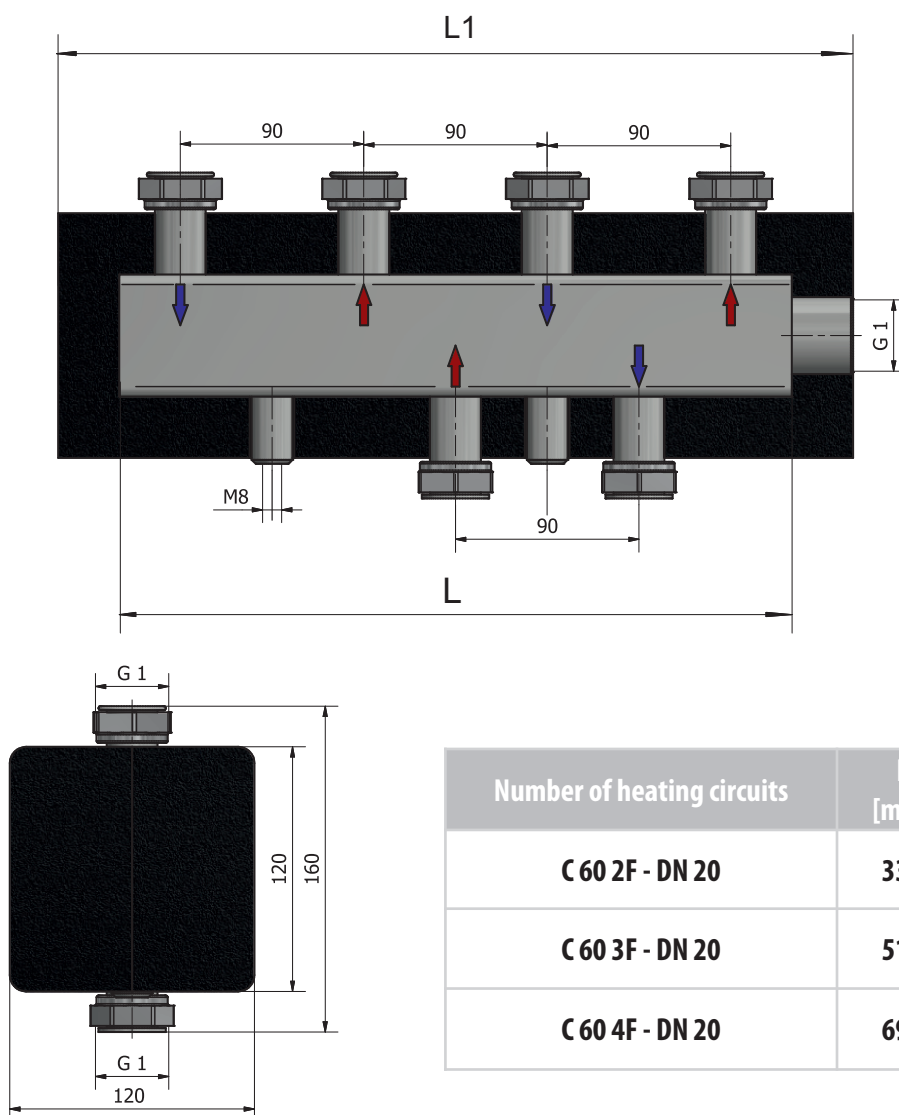

Number of heating circuits	L [mm]	L1 [mm]
C 60 2F - DN 20	330	390
C 60 3F - DN 20	510	570
C 60 4F - DN 20	690	750

Type	Catalog number
Central heating zone manifold C 60 2 F - DN 20 with insulation	605011
Central heating zone manifold C 60 3 F - DN 20 with insulation	605012
Central heating zone manifold C 60 4 F - DN 20 with insulation	605013
Wall bracket kit Delta C 60,C 70,C 100, CN 100	606015

