


Central heating zone manifold C2XL 150 - DN 150

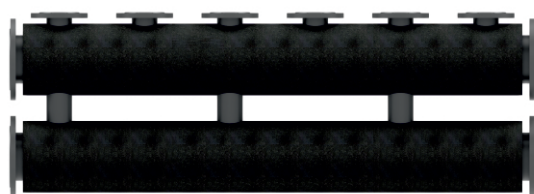

The C2XL 150, 2 or 3 circuit, two-chamber steel distributor was created to facilitate the assembly of DN 50, 65, 80 pump groups. It is factory-equipped with EPP insulation and has a DN 80 flange connection on the installation side. The distributor contains 2 DN 150 seals, a set of 8 assembly screws for connecting to another distributor or hydraulic clutch. On request, we can make distributors with a different connection.


Technical data:

Material:	steel
Maximum pressure:	6 bar
Maximum temperature:	110°C
Heating power:	1200 kW at $\Delta T 20^\circ\text{C}$
Insulation:	EPP black 40 g/l
Flange pressure standard:	PN 16

Type	Power [kW] at $\Delta T 20^\circ\text{C}$	Flow [m ³ /h]	Catalog number
Zone manifold C2XL 150 2 F - DN 150 with insulation	1200,00	50,00	609191
Zone manifold C2XL 150 3 F - DN 150 with insulation	1200,00	50,00	609192

Type	Catalog number
Brackets for mounting the distributor on the ground (1 set = 2 pieces)	607040

Dimensional diagram

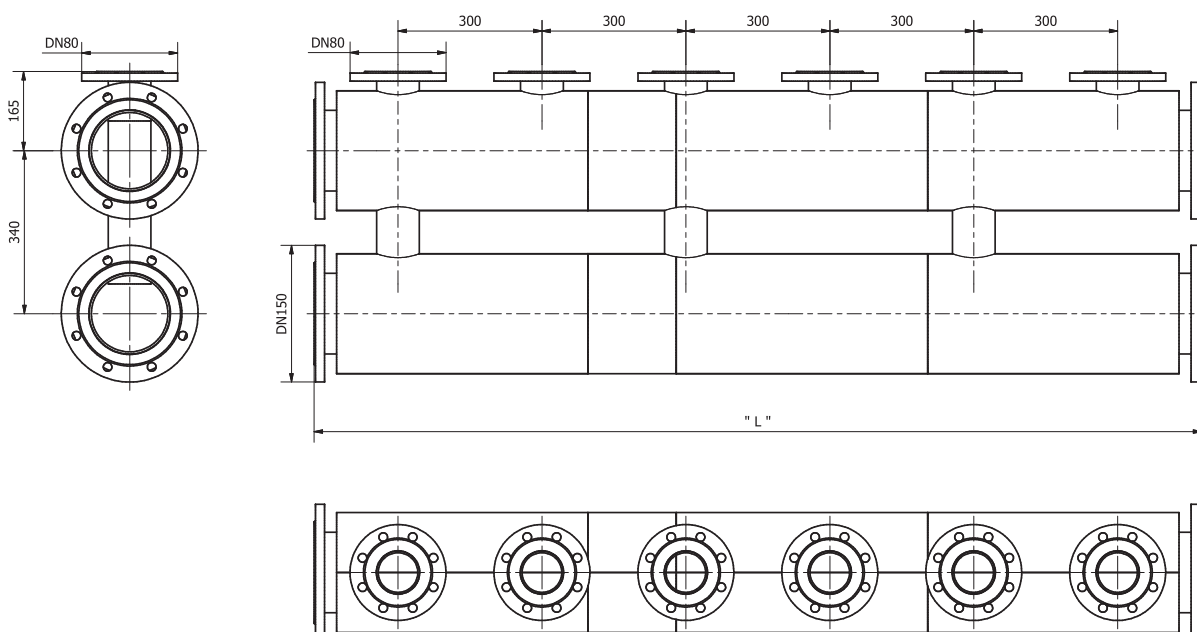

Number of circuits	2	3
L	1250	1850