

## DHW safety group 6 bar




DHW safety group is an important element of the hot water installation, whose main task is to protect the installation against the increase in pressure caused by the increase in water temperature in the system. It is intended for installation in home heating systems. The beam is equipped with a 6 bar safety valve, a pressure gauge and a set of mounting pins. Additionally, in the lower part of the beam there are connections for the expansion vessel and the safety beam supply.

### Technical data:


Material:	brass
Maximum operating temperature:	95°C
Max. working pressure:	8 bar
Safety valve opening pressure:	6 bar
Vessel connection:	3/4" GW
Installation connection:	3/4"
Medium:	water/glycol

Type	Catalog number
DHW safety group 6 bar, with equipment	200611
DHW safety group 6 bar, with equipment, with automatic 3/4" quick coupling	200612

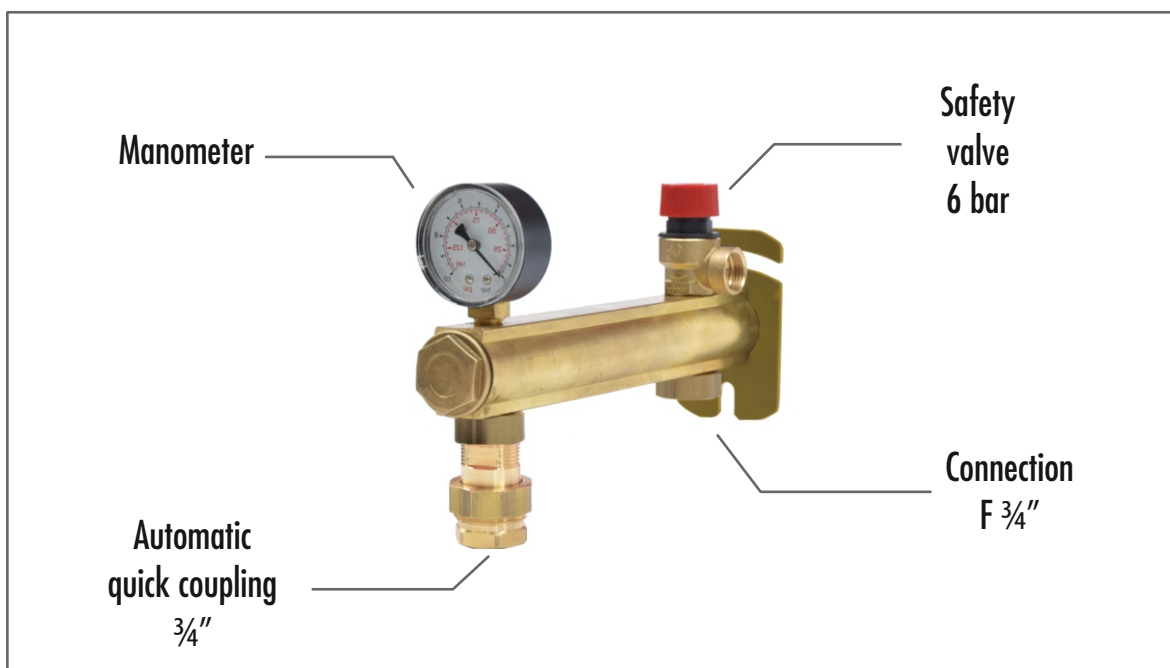

### Application example

DHW  
safety group

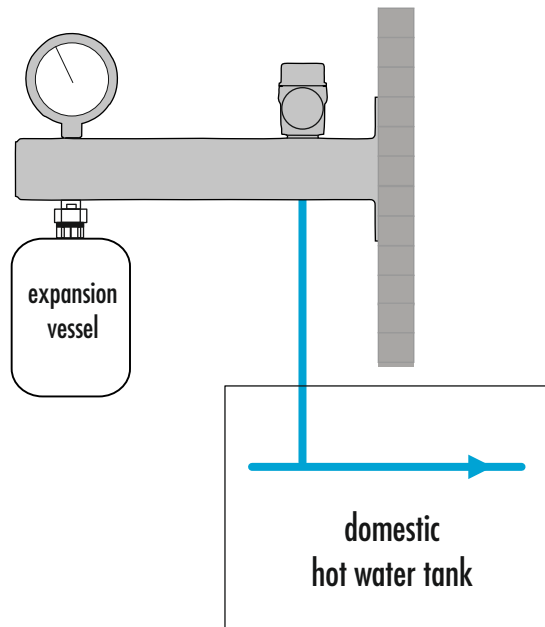

Simplified schematic diagram of the installation - the standard ones were not marked installation elements as well as the boiler room security scheme.

### Dimensional diagram

