

## Central heating zone manifold C 2 120 - DN 50




Two-chamber steel manifold **C2 120 DN 50** – 2 or 3 heating circuits was created to simplify installation of pump groups DN 25, DN 32, DN 40, DN 50. The factory manifold is equipped with EPP insulation. Additional manifold is equipped with two thermometers and two the socket ½ " F drain.

### Technical data:

Raw material:	steel ST 37.1
Max pressure:	6 bar
Max temp.:	110°C
Max. power:	350 kW ( $\Delta T$ 20°C)
Axle spacing:	Installation side: 250 mm
Connections:	Installation side: 2" M
	Boiler side: 2 ½"
Insulation material:	EPP black 40 g/l

Type	Catalog number
Central heating zone manifold C 2 120 2 F - DN 50 with insulation	609011
Central heating zone manifold C 2 120 3 F - DN 50 with insulation	609012
Brackets for mounting manifold on the floor (1 set = 2 pcs )	607040

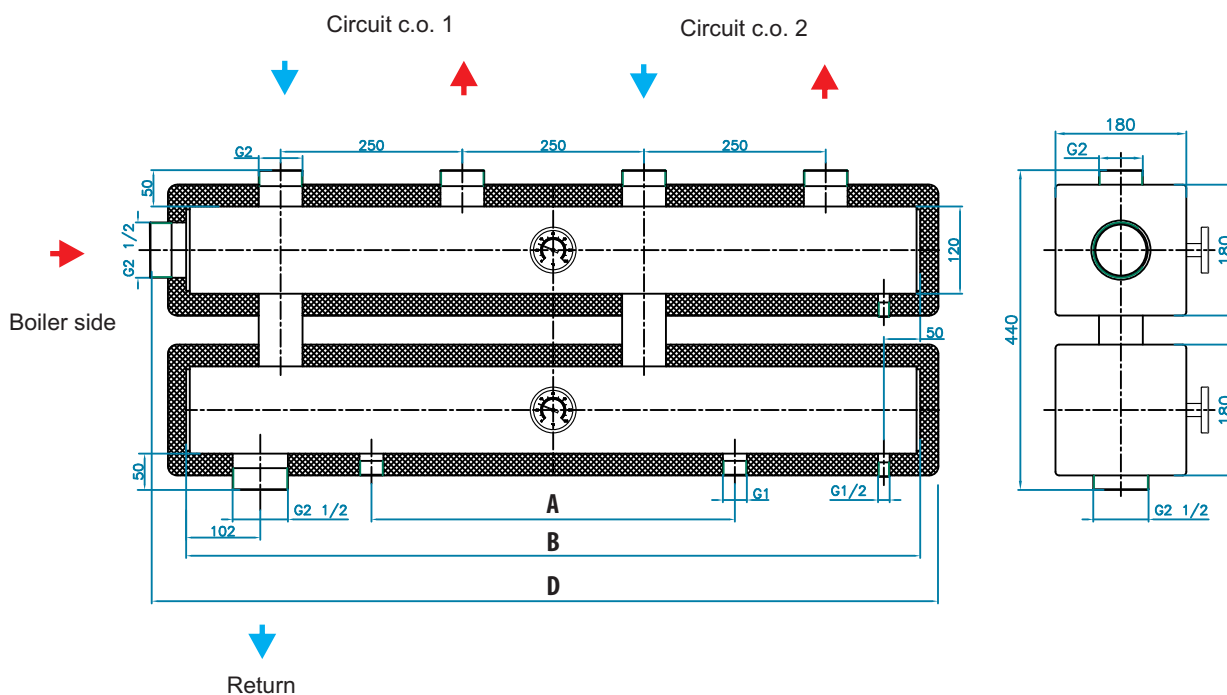

Number of heating circuits	A	B	C	D
2	500	1010	X	1090
3	1000	1540	X	1620

