

Central heating zone manifold C 100 - DN 32



(optional)

Connection DN 1 1/4" x 2" with brass nut

Connection with built-in ball valve DN 1 1/4" x 2" with brass nut



Two-chamber steel manifold **C 100 DN 32** - 2, 3, 4, 5 or 6 heating circuits was created to simplify installation of pump groups DN 32. The factory manifold is equipped with EPP insulation. In addition, the manifold has an output DN 20 on the boiler side for connecting pressure vessel and the output DN 25 on the installation side for connecting the safety group. On request, the manifold can be equipped with a set of mounting brackets on the wall **DELTA** (see bushings M8).


Warning! In order to connect the DN 32 group to the manifold it is necessary to buy additional connections DN 1 1/4" x 2" or connections with integrated ball valve (see below).

Warning! The exception is the manifold C 100 6F. The above-mentioned manifold can be equipped with a set of mounting brackets on the floor cod. 607040 (see the socket G1 ").

Technical data:

Raw material:	steel ST 37.1
Max pressure:	8 bar
Max temp.:	110°C
Max. power:	120 kW (ΔT 20°C)
Axle spacing:	Installation side: 125 mm Boiler side: 125 mm
Connections:	Installation side: 1 1/4" M Boiler side: 1 1/4" M
Insulation:	EPP black 40 g/l

Type	Catalog number
Central heating zone manifold C 100 2F - DN 32 with insulation	607011
Central heating zone manifold C 100 3F - DN 32 with insulation	607012
Central heating zone manifold C 100 4F - DN 32 with insulation	607013
Central heating zone manifold C 100 5F - DN 32 with insulation	607014
Central heating zone manifold C 100 6F - DN 32 with insulation	607015
Brackets for mounting manifold on the floor (1 set = 2 pcs)	607040
Wall bracket kit DELTA for zone manifolds	606015
Reduction for mounting groups DN 25 on manifold C 100 DN 32, C2 100 - DN 32 - set = 2 pcs.	607023
Connection DN 1 1/4" x 2" with brass nut - 1 pc	607016
Connection DN 1 1/4" x 2" with built-in ball valve, with brass nut - 1 pc	607017
Connection DN 1 1/4" x 2" with brass nut, with check valve for groups SMT, SMTC - 1 pc	607018

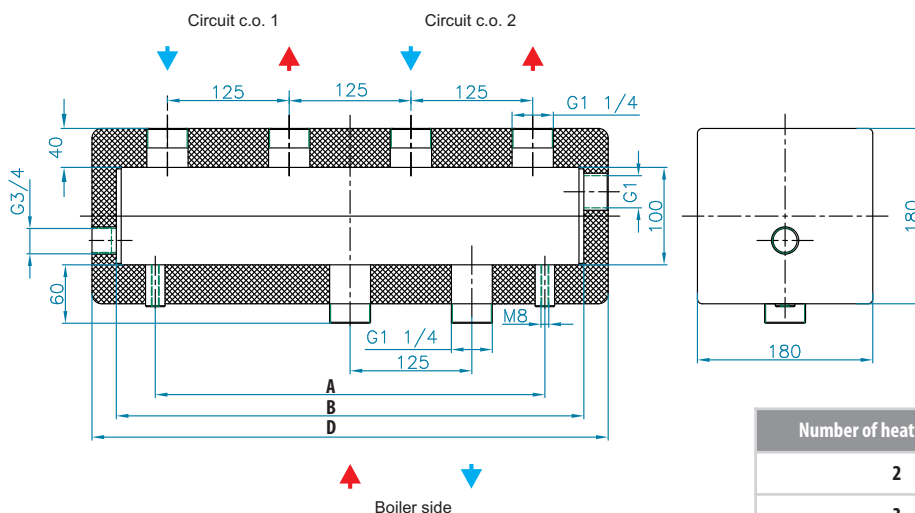

Number of heating circuits	A	B	C	D
2	400	480	X	530
3	665	745	X	795
4	930	1010	X	1060
5	1195	1275	X	1325
6	1100	1540	X	1590